

# QPP Proprietary Profile Guide

Rev. <1.1> — 04 April 2018

Application note

## Document information

Info	Content
<b>Keywords</b>	Proprietary Profile, Server, Client
<b>Abstract</b>	The Proprietary Profile is used to transfer the raw data between BLE devices.



**Revision history**

<b>Rev</b>	<b>Date</b>	<b>Description</b>
0.1	20140520	Initial release
0.2	20150108	Update the uuid location of character7
1.0	20150331	Update to NXP template
1.1	20180404	Updated the title

## Contents

<b>Contents</b> .....	<b>3</b>
<b>1. Introduction</b> .....	<b>4</b>
1.1 Profile Dependencies .....	4
1.2 Conformance .....	4
1.3 Bluetooth Specification Release Compatibility ..	4
<b>2. Configuration</b> .....	<b>4</b>
2.1 Roles .....	4
2.2 Role/Service Relationships.....	4
2.3 Concurrency Limitations and Restrictions .....	5
2.4 Topology Limitations and Restrictions .....	5
2.5 Transport Dependencies .....	5
<b>3. QPP Server Role Requirements</b> .....	<b>5</b>
3.1 Incremental QPP Service Requirements .....	5
3.1.1 Service UUIDs AD Type .....	5
3.1.2 Local Name AD Type .....	5
3.2 Service Characteristics .....	5
<b>4. QPP Client Role Requirements</b> .....	<b>7</b>
4.1 GATT Sub-Procedure Requirements.....	7
4.2 Service Discovery .....	7
4.2.1 QPP Server Service Discovery .....	8
4.3 Characteristic Discovery .....	8
4.3.1. QPP Server Service Characteristic Discovery ...	8
4.4 Transmit Data to Server .....	8
4.5 Retrieve Data from Server .....	8
<b>5. Connection Establishment</b> .....	<b>8</b>
5.1 QPP Server Connection Establishment .....	8
5.1.1 Device Discovery .....	8
5.1.2 Connection Procedure .....	9
5.2 QPP Client Connection Establishment .....	9
5.2.1 Device Discovery .....	9
5.2.2 Connection Procedure .....	9
<b>6. Legal information</b> .....	<b>11</b>
6.1 Definitions .....	11
6.2 Disclaimers .....	11
6.3 Trademarks .....	11
<b>7. List of figures</b> .....	<b>12</b>
<b>8. List of tables</b> .....	<b>13</b>

## 1. Introduction

The QPP is used to transfer the raw data between BLE devices.

### 1.1 Profile Dependencies

This profile requires the Generic Attribute Profile (GATT).

### 1.2 Conformance

If conformance to this profile is claimed, all capabilities indicated as mandatory for this profile shall be supported in the specified manner (process-mandatory). This also applies for all optional and conditional capabilities for which support is indicated. All mandatory capabilities, and optional and conditional capabilities for which support is indicated, are subject to verification as part of the *Bluetooth* qualification program.

### 1.3 Bluetooth Specification Release Compatibility

This specification is compatible with any *Bluetooth* Core Specification that includes the Generic Attribute Profile (GATT) specification and the Bluetooth Low Energy Controller specification.

## 2. Configuration


### 2.1 Roles

The profile defines two roles: QPP Server and QPP Client.

- The QPP Server shall be a GATT server.
- The QPP Client shall be a GATT client.

### 2.2 Role/Service Relationships

The **Figure 1** shows the relationships between services and the two profile roles.

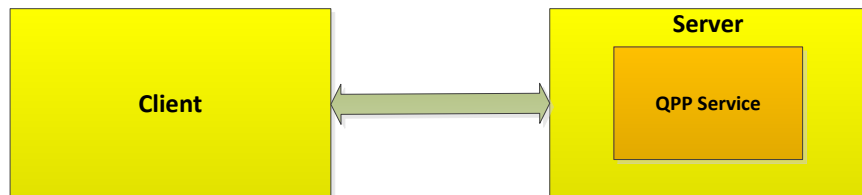

**Figure 1 Role / Service Relationships**

*Note: Profile roles are represented by yellow boxes and services are represented by orange boxes.*

A QPP Server shall instantiate one and only one QPP Service.

## 2.3 Concurrency Limitations and Restrictions

There are no concurrency limitations or restrictions for the QPP Client and Server roles imposed by this profile.

For cases where bonding is supported multiple bonds may be supported, but is outside the scope of this profile.

## 2.4 Topology Limitations and Restrictions

The QPP Server shall use the GAP Peripheral role.

The QPP Client shall use the GAP Central role.

## 2.5 Transport Dependencies

This profile shall operate over an LE transport.

## 3. QPP Server Role Requirements

The QPP Server shall instantiate one and only one QPP Service.

**Table 1 QPP Server Service Requirements**

Service	Requirement
QPP Service	Mandatory

### 3.1 Incremental QPP Service Requirements

This section describes additional Server requirements beyond those defined in the QPP Server Service.

#### 3.1.1 Service UUIDs AD Type

While in a GAP Discoverable Mode for initial connection to a Client, the QPP Server should include the QPP Service UUID defined in **Table 1** in the Service UUIDs AD type field of the advertising data. This enhances the user experience as a server may be identified by the client before initiating a connection.

#### 3.1.2 Local Name AD Type

For enhanced user experience a QPP Server may include the Local Name in its Advertising Data or Scan Response data.

### 3.2 Service Characteristics

The following characteristics are exposed in the QPP Service. Unless otherwise specified, only one instance of each characteristic is permitted within this service.

**Table 2 QPP Service characteristics**

Characteristic Name	Requirement	Mandatory Properties	Optional Properties	Security Permissions	UUID
QPP Service Declaration	M	Read		None.	UUID *

(Primary Service)					
RX Char. Declaration	M	Read		None.	
RX Char. Value	M	Write Without Response		None.	UUID **
RX User Descriptor	M	Read		None.	
TX Char. (1) Declaration	M	Read		None.	
TX Char. (1) Value	M	Notify		None.	UUID ***
TX Client Char(1). Configuration Descriptor	M	Read,Write			
TX Char. (2) Declaration	O	Read		None.	
.....	.....	.....	.....	.....	.....
Characteristic Name	Requirement	Mandatory Properties	Optional Properties	Security Permissions	UUID
TX Char. (7) Declaration	O	Read		None.	
TX Char. (7) Value	O	Notify		None.	UUID ****
TX Client Char(7). Configuration Descriptor	O	Read,Write		None.	

\*: The UUID of QPP Service should be a 128-bit value:0x

0000FEE900001000800000805F9B34FB

\*\* : The UUID of RX characteristic is

0xD44BC439ABFD45A2B575925416129600

\*\*\*: The UUID of TX characteristic is

0xD44BC439ABFD45A2B575925416129601

\*\*\*\*: The UUID of TX characteristic is

0xD44BC439ABFD45A2B575925416129607

### Notes:

1. Security Permissions of “None” means that this service does not impose any requirements.
2. The alphabet 7 represents the maximum number of TX Characteristic.
3. TX(1) Characteristic is used for flow control.
4. In QPP profile code, we use the range from D44BC439-ABFD-45A2-B575-925416129601 to D44BC439-ABFD-45A2-B575-925416129607 as the UUID of TX Characteristic value and D44BC439-ABFD-45A2-B575-925416129600 as the UUID of RX Characteristic value for demo.

5. User should adjust these values in their products.

## 4. QPP Client Role Requirements

The Client shall support the QPP Service.

**Table 3 QPP Client Service Requirements**

Service	Requirement
QPP Service	Mandatory

This section describes the profile procedure requirements for a QPP Client.

**Table 4 QPP Client Requirements**

Profile Requirement	Section	Support
Service Discovery	<a href="#">4.2</a>	Mandatory
- QPP Server Service Discovery	<a href="#">4.2.1</a>	Mandatory
Characteristic Discovery	<a href="#">4.3</a>	Mandatory
- QPP Server Service Characteristic Discovery	<a href="#">4.3.1</a>	Mandatory
Transmit Data to Server	<a href="#">4.4</a>	Mandatory
Retrieve Data from Server	<a href="#">4.5</a>	Mandatory

### 4.1 GATT Sub-Procedure Requirements

Requirements in this section represent a minimum set of requirements for a Client. Other GATT sub-procedures may be used if supported by both Client and Server.

**Table 5** summarizes additional GATT sub-procedure requirements beyond those required by all GATT Clients.

**Table 5 Additional GATT Sub-Procedure Requirements**

GATT Sub-Procedure	QPP Client Requirements
Discover All Primary Services	C1
Discover Primary Services by Service UUID	C1
Discover All Characteristics of a Service	C2
Discover Characteristics by UUID	C2
Discover All Characteristic Descriptors	M
Write Characteristic Value	M
Notifications	M

*C1: Mandatory to support at least one of these sub-procedures.*

*C2: Mandatory to support at least one of these sub-procedures.*

### 4.2 Service Discovery

The Client shall perform primary service discovery using either the GATT *Discover All Primary Services* sub-procedure or the GATT *Discover Primary Services by Service UUID* sub-procedure. Recommended fast connection parameters and procedures for connection establishment are defined in Section

### 5.2.2.

#### 4.2.1 QPP Server Service Discovery

The Client shall perform primary service discovery to discover the QPP Server Service.

### 4.3 Characteristic Discovery

As required by GATT, the Client must be tolerant of additional optional characteristics in the service records of services used with this profile.

#### 4.3.1. QPP Server Service Characteristic Discovery

The Client shall use either the GATT *Discover All Characteristics of a Service* sub-procedure or the GATT *Discover Characteristics by UUID* sub-procedure to discover the characteristics of the service.

The Client shall use the GATT *Discover All Characteristic Descriptors* sub-procedure to discover the characteristic descriptors described in the following sections.

##### 4.3.1.1 TX Characteristic

The TX is relative to the server-side.

The Client shall discover the TX characteristic.

The Client shall discover the *Client Characteristic Configuration* descriptor of the TX characteristic.

##### 4.3.1.2 RX Characteristic

The RX is relative to the server-side.

The Client shall discover the RX characteristics sequences.

### 4.4 Transmit Data to Server

The RX characteristic are used to transmit data from client to server. Client can write data to this characteristic to transfer raw data.

### 4.5 Retrieve Data from Server

The TX characteristic is used to transmit data from server to client.

The number of TX characteristic can be configured when creating QPP service database.

## 5. Connection Establishment

---

This section describes the connection establishment used by a Client and Server in certain scenarios.

### 5.1 QPP Server Connection Establishment

#### 5.1.1 Device Discovery

The Server should use the GAP *General Discoverable Mode* or *Limited*



*Discoverable Mode* when establishing an initial connection.

### 5.1.2 Connection Procedure

This procedure is used for connection establishment when the Server connects to a Client. This may be initiated either through user interaction or autonomously when the Server has a notification is pending.

It is recommended that the Server advertises using the parameters in **Table 6**.

The interval values in the first row are designed to attempt fast connection during the first 30 seconds; however, if a connection is not established within that time, the interval values in the second row are designed to reduce power consumption for devices that continue to advertise.

**Table 6 Recommended Advertising Interval Values**

Advertising Duration	Parameter	Value
First 30 seconds (fast connection)	Advertising Interval	20 ms to 30 ms
After 30 seconds (reduced power)	Advertising Interval	1 s to 2.5 s

The advertising interval and time to perform advertising should be configured with consideration for user expectations of connection establishment time. The Server shall accept any valid values for connection interval and connection latency set by the Client. The Server may change connection parameters that best suits its use case.

## 5.2 QPP Client Connection Establishment

### 5.2.1 Device Discovery

The Client should use the GAP *General Discovery Procedure* or *Limited Discovery Procedure* to discover a Server.

### 5.2.2 Connection Procedure

This procedure is used for connection establishment when the Client connects to a Server. This may be initiated either through user interaction or autonomously when a Client requires data from a Server.

A Client may use one of the following GAP connection procedures based on its connectivity requirements:

- *General Connection Establishment Procedure*. The Client may use this procedure when it requires data from one or more Servers. This procedure allows a Client to connect to a Server discovered during a scan without using the white list.
- *Direct Connection Establishment Procedure*. The Client may use this procedure when it requires data from a single Server.
- *Auto Connection Establishment Procedure*. The Client may use this procedure when it requires data from one or more Servers or other sensors. This procedure will automatically connect to a Server in the white list.
- *Selective Connection Establishment Procedure*. The Client may use this procedure when it requires data from one or more Servers. This procedure allows a Client to connect to a Server discovered during a scan while using the white list.

The Client should use the recommended scan interval and scan window values shown in **Table 7**. For the first 30 seconds (or optionally continuously for mains powered devices), the Client should use the first scan window / scan interval pair to attempt fast connection. However, if a connection is not established within that time, the Client should switch to one of the other scan window / scan interval options as defined below to reduce power consumption.

**Table 7 Recommended Scan Interval and Scan Window Value**

Advertising Duration	Parameter	Value
First 30 seconds (fast connection)	Scan Interval	30ms to 60ms
	Scan Window	30ms
After 30 seconds (reduced power) - Option 1	Scan Interval	1.28s
	Scan Window	11.25ms
After 30 seconds (reduced power) - Option 2	Scan Interval	2.56s
	Scan Window	11.25ms

## 6. Legal information

### 6.1 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

### 6.2 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as

well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Evaluation products** — This product is provided on an "as is" and "with all faults" basis for evaluation purposes only. NXP Semiconductors, its affiliates and their suppliers expressly disclaim all warranties, whether express, implied or statutory, including but not limited to the implied warranties of non-infringement, merchantability and fitness for a particular purpose. The entire risk as to the quality, or arising out of the use or performance, of this product remains with customer.

In no event shall NXP Semiconductors, its affiliates or their suppliers be liable to customer for any special, indirect, consequential, punitive or incidental damages (including without limitation damages for loss of business, business interruption, loss of use, loss of data or information, and the like) arising out of the use of or inability to use the product, whether or not based on tort (including negligence), strict liability, breach of contract, breach of warranty or any other theory, even if advised of the possibility of such damages.

Notwithstanding any damages that customer might incur for any reason whatsoever (including without limitation, all damages referenced above and all direct or general damages), the entire liability of NXP Semiconductors, its affiliates and their suppliers and customer's exclusive remedy for all of the foregoing shall be limited to actual damages incurred by customer based on reasonable reliance up to the greater of the amount actually paid by customer for the product or five dollars (US\$5.00). The foregoing limitations, exclusions and disclaimers shall apply to the maximum extent permitted by applicable law, even if any remedy fails of its essential purpose.

### 6.3 Trademarks

Notice: All referenced brands, product names, service names and trademarks are property of their respective owners.

## 7. List of figures

---

Figure 1 Role / Service Relationships .....4

## 8. List of tables

---

Table 1 QPP Server Service Requirements .....	5
Table 2 QPP Service characteristics .....	5
Table 3 QPP Client Service Requirements .....	7
Table 4 QPP Client Requirements .....	7
Table 5 Additional GATT Sub-Procedure Requirements .....	7
Table 6 Recommended Advertising Interval Values .....	9
Table 7 Recommended Scan Interval and Scan Window Value .....	10